





# id conversion: single-value



domain subtree





identifiers satisfying condition

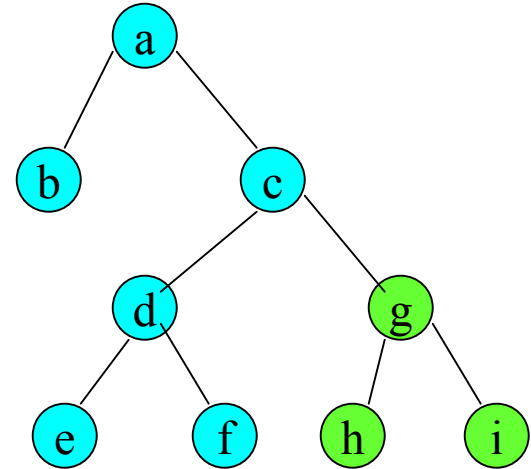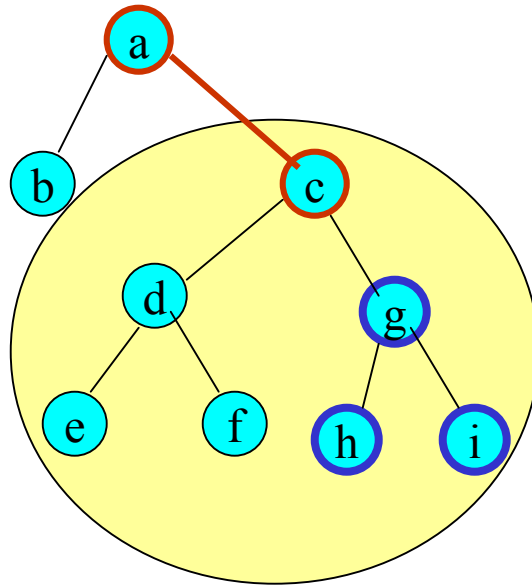



If path is a-c and identifier has “g” field, change g-field value to 3

# id conversion: truncate

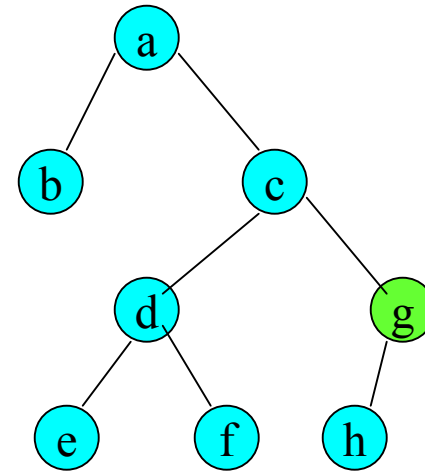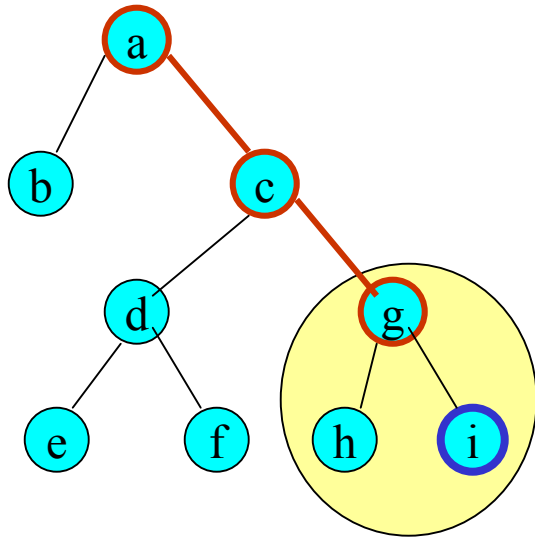


If path is a-c-g and identifier has “i” field, send to a-c-g

id conversion: disappear

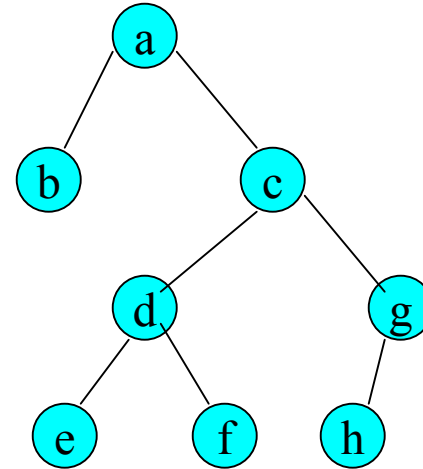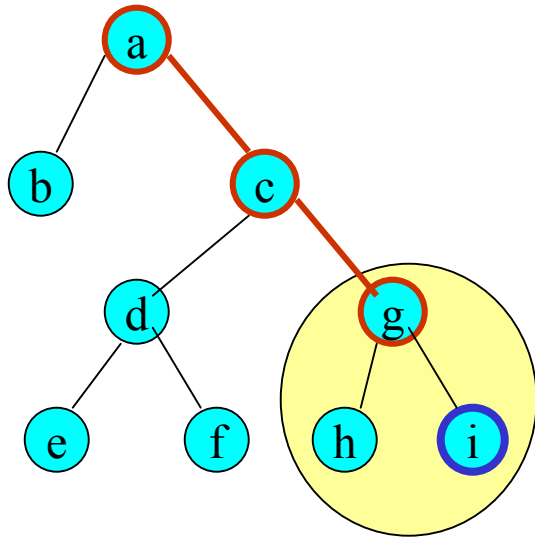

If path is a-c-g and identifier had “i” field, send to null

# id conversion: compress

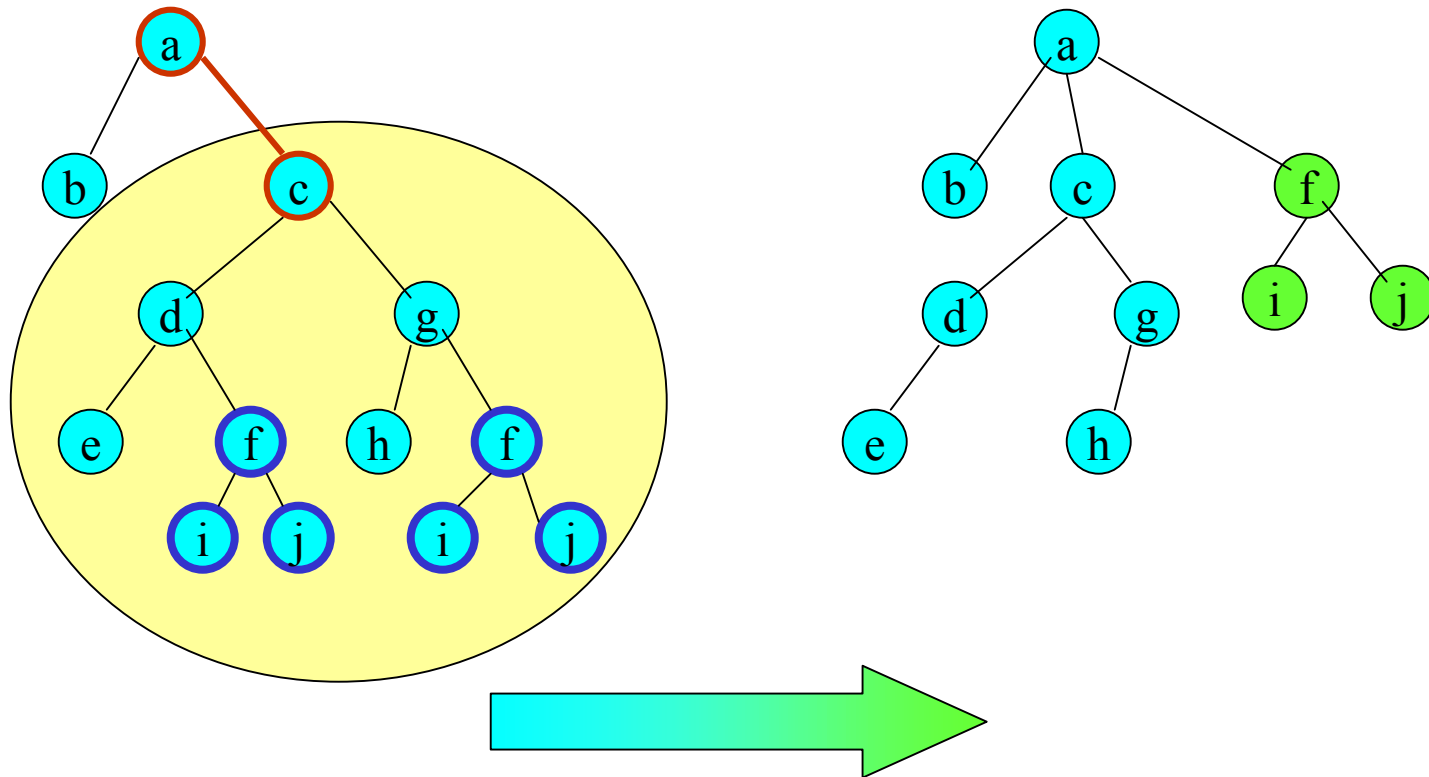

If initial path is a-c and id has “f” field, a-c-(anything)-f-stuff goes to a-f-stuff