


Direct Search for Dark Photons with the SeaQuest Spectrometer

Sho Uemura, Kun Liu, Ming Liu
Los Alamos National Laboratory
SeaQuest Collaboration



The SeaQuest facility

- Fixed-target muon spectrometer, Fermilab 120 GeV proton beam
- Primary program: Drell-Yan measurements of sea quark distributions
 - ▶ E906 (unpolarized targets, 2012–2017), E1039 (polarized targets, 2019–2020)
- Parasitic searches for dark photons approved 2015 (E1067)

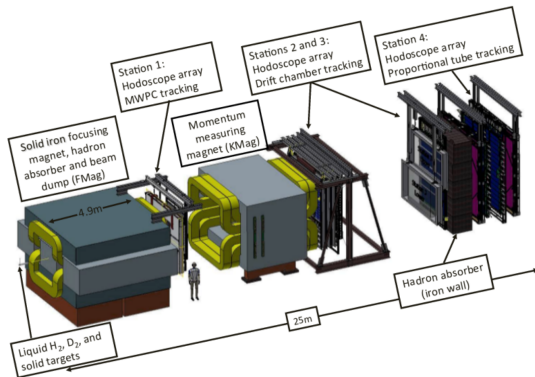



Production and signatures at SeaQuest

- Three dominant production mechanisms: meson decay, proton bremsstrahlung, Drell-Yan (yields from arXiv:1804.00661)
- Prompt $A' \rightarrow \mu^+ \mu^-$: bump-hunt
- Displaced $A' \rightarrow \mu^+ \mu^-$: background suppressed by vertexing
- Displaced $A' \rightarrow e^+ e^-$: background absorbed in dump

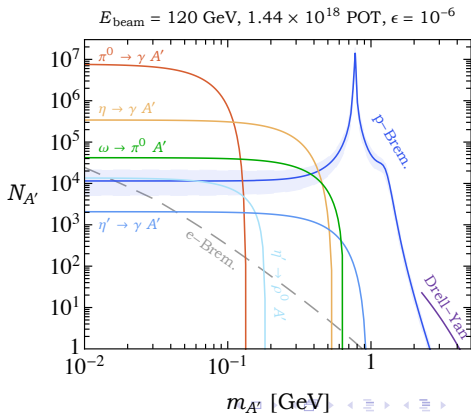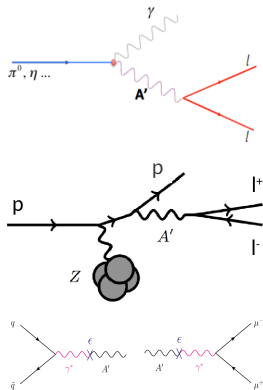



SeaQuest searches for dark photons

- Dimuons in main SeaQuest dataset
 - ▶ Bump-hunt at high mass (ongoing effort)
- Dimuon displaced-vertex trigger
 - ▶ Commissioned 2017
- Dielectron trigger
 - ▶ EMCal for electron PID (proposals in preparation)

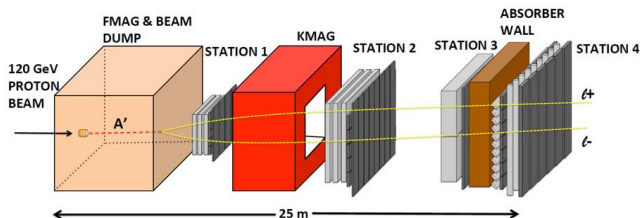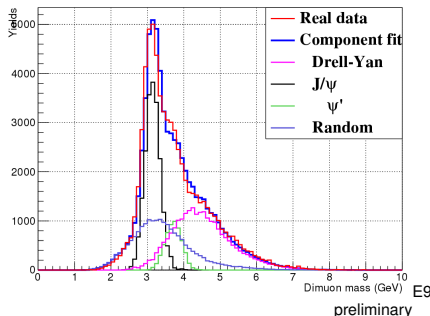


Displaced vertex trigger

- Two new fine-grained scintillator hodoscopes measure track Y
- Existing station 4 paddles are used for muon ID
- FPGA trigger extrapolates tracks to the beam plane and fires on pairs of tracks with large Z

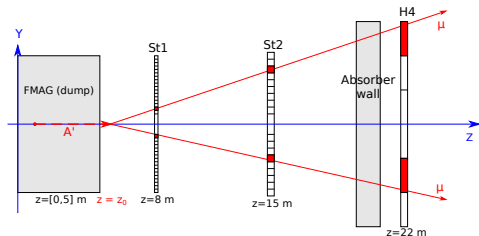



Trigger hodoscopes

- Extruded scintillator bars detect charged particles, wavelength-shifting fibers collect light and transport it to SiPMs
- Each station is split into quadrants; active area has a beam gap of $|y| > 7.5$ cm but minimal gap in x
- Station 1: $z = 8$ m, 1 cm segmentation, 80 bars/quadrant
- Station 2: $z = 15$ m, 2 cm segmentation, 50 bars/quadrant





Readout and services

- Power supplies provide independent control of every SiPM bias voltage
- Postage-stamp preamps read out the SiPMs and send signals to discriminators
- Discriminators fan out to TDCs (readout) and CAEN V1495 FPGA boards (trigger)



Trigger logic

- Two levels: identify displaced tracks, trigger on pairs
- L1: three-way coincidence within each quadrant
 - ▶ Identify displaced tracks ($z_0 \in [400, 650]$ cm) in each quadrant using hit patterns (“roads”)
- L2: two-out-of-four coincidence between opposite-sign quadrants

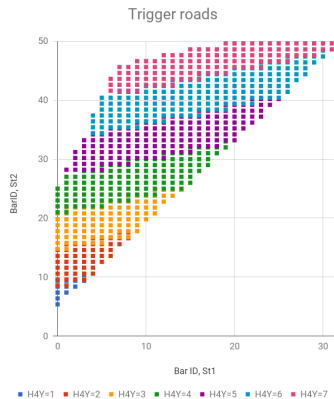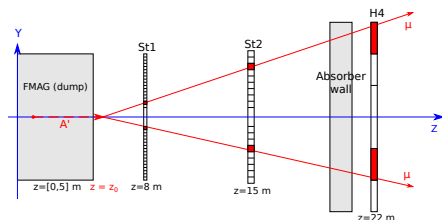




Installation and commissioning

- Trigger hodoscopes installed on the SeaQuest beamline spring 2017
- Displaced vertex trigger rate is $\sim 5\%$ of the SeaQuest Drell-Yan trigger, acceptable for parasitic running
- 5 days of good data taken with the displaced vertex trigger before accelerator shutdown: 8×10^{15} live protons on target
- Expect $O(10^{18})$ POT over the next two years, parasitic with new SeaQuest polarized target run




Detector performance

- Efficiencies $\sim 95\%$ excepting $\sim 10\%$ bad channels
- Inefficiency: bar gaps
- Bad channels: inconsistent optical coupling (will fix)

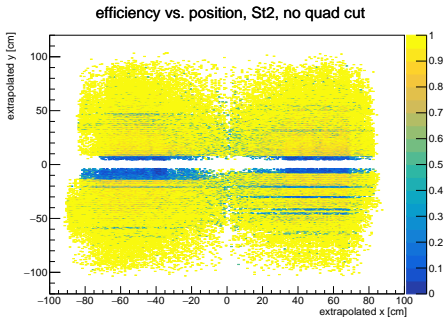



Trigger performance in 2017 data

- Displaced-vertex trigger is 150 ns late relative to the event (cabling mistake during commissioning)
- Damage report: lost all hits in station 1 drift chamber (120 ns drift time) and $\sim 50\%$ of hits in other drift chambers
- We can make straight tracks in stations 2–4 and try to assess backgrounds in the non-bend view
 - ▶ Problem: very bad (and angle-dependent) tracking efficiency
- We can look at hodoscope hit information (not in time relative to events that fired the displaced-vertex trigger) to understand trigger backgrounds
 - ▶ May allow us to optimize the trigger criteria

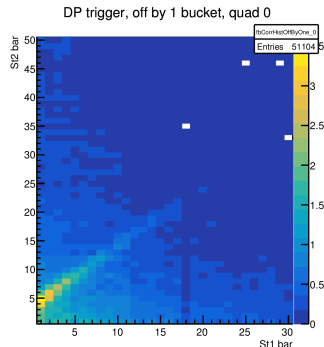

Schedule and prospects

- Updated reach estimates soon
 - ▶ Realistic trigger geometry and acceptance
- SeaQuest will run with polarized target (E1039) for two years: displaced-vertex dark photon search will run parasitically
 - ▶ Displaced-vertex trigger will be ready to go when beam is available
- Possible PID upgrade (using recycled PHENIX EMCal) will add sensitivity to dielectron decay channel and other new physics (SIMPs, IDM)

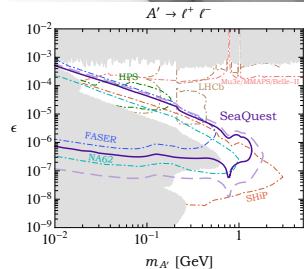

EMCal upgrade

- One PHENIX EMCal sector: $2 \times 4 \text{ m}^2$ wall of Pb-scintillator shashlyks
- Refurbish the readout: replace PMTs with SiPMs, new readout electronics
- Simple energy threshold can trigger on non-MIP particles
- Track matching enables electron ID

